

# Insulated Multi-Functional Cookers

**Electric,  
Insulated for Safety™  
10° Tilting, Leg Mounted  
Made in USA**

# Skittle® Model SK

## Standard Features



**Model SK10-9  
(with optional food pans)**

- ◆ 304 stainless food contact zone with:
  - ◇ 304 stainless 1 ½" compression draw-off
- ◆ 304 stainless seam welded pan body with:
  - ◇ 10° tilting pan, 31" working height
  - ◇ Food pan holder under draw-off (except SK5)
  - ◇ Insulated sides and bottom
  - ◇ Tapered access rim
  - ◇ 240V, three phase (3Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ Patented 304 stainless seam welded Capsule Lid with:
  - ◇ Variable position, actuator-assisted opening
  - ◇ Insulated sides & top
  - ◇ Adjustable steam vent
  - ◇ 304 stainless safety handle
  - ◇ "L" Lid condensate containment
- ◆ Cassette rack(s) for 12x20 food pans
- ◆ 304 stainless, seam welded component enclosure
- ◆ 304 stainless, seam welded tubular frame construction
- ◆ Single ball valve with 48" s/s flexible spray hose assembly
- ◆ Adjustable flanged feet

Legion equipment is built to comply with applicable standards for manufacturers. Approval agencies may include ASME, NSF, UL, ETL, AGA, CSA, CGA, and others. Legion reserves the right of design improvement or modification as warranted. U.S. Patent Nos. 5,553,531, 5,964,145 & Des. 371,715.

## Models and Capacities

Model	2.5" Insert Pans	Cooking Baskets	Griddle Area (in. <sup>2</sup> )	Kettle (Gals.)	Frying Oil (lbs.)	Oven Volume (ft. <sup>3</sup> )
SK5-5	5	4	351	7.6	35	3.9
SK5-7	5	4	351	10.6	35	4.3
SK5-9	5	4	351	13.7	35	4.7
SK10-5	10	8	703	15.2	70	7.7
SK10-7	10	8	703	21.3	70	8.5
SK10-9	10	8	703	27.4	70	9.4
SK10-11	10	8	703	33.5	70	10.2
SK15-5	15	12	1029	22.3	105	11.3
SK15-7	15	12	1029	31.2	105	12.5
SK15-9	15	12	1029	40.1	105	13.7
SK15-11	15	12	1029	49.0	105	14.9

Select draw-off valve:  1.5"  2"  3"

With:  compression  ball type fitting

See price list for other draw-off options.

Select Voltage:  208V  240V  380V  415V  440V  480V

Select Phase:  1φ  3φ

## Optional Features and Accessories

See price list for supplemental information regarding options

### Faucet Options:

Single ball valve mounted to frame with 48" vinyl flexible spray hose assembly

48" flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet

Automatic water filling meter

(Call for information regarding additional faucet options)

### Prison/Security Options:

Fasteners (screws & nuts)

Nut driver tool

Draw-off nut driver tool

Screw driver tool

Lockable control cover

Draw-off protection

### Other Options:

Electric timer with buzzer

Knockdown capability for 26" x 66" opening (shipped assembled)

### Accessories:

Perforated cooking/steaming basket (11" x 20½" x 5")

Perforated or solid 12 x 20 food pans, 2½, 4 or 6 inch deep

Draw-off drain spout

Draw-off strainer

Draw-off drain hose

#10 Can holder for draw-off

Flat bottom scoop

Fry scoop

Skittle care kit



**LEGION** Legion Industries, Inc.  
(706) 554-4411 Fax: (706) 554-2035


P.O. Office Box 728 Waynesboro, GA 30830 (800) 887-1988  
www.legionindustries.com sales@legionindustries.com

# Skittle® Model SK

Electric,  
Insulated for Safety™  
10° Tilting, Leg Mounted  
Made in USA

# Insulated Multi- Functional Cookers

DRAWING REPRESENTS MODEL SK10-7 WITH 1 1/2 DRAW-OFF

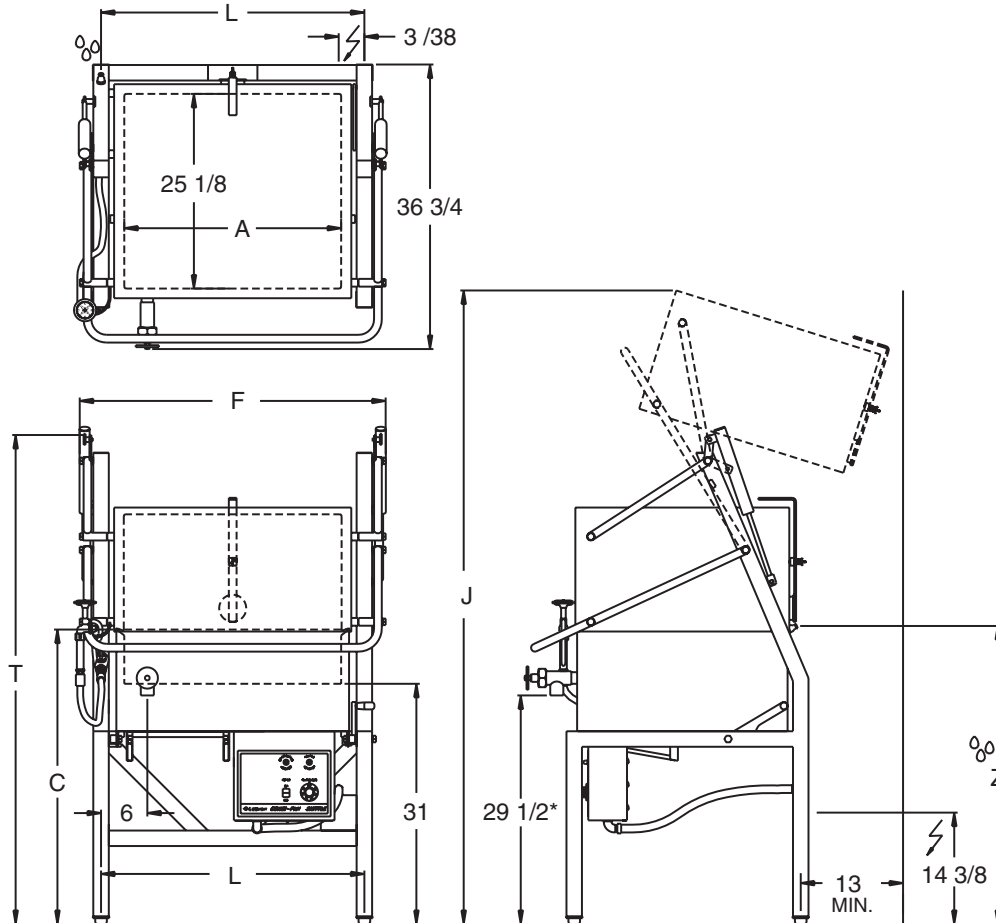

### SKITTLE® DIMENSIONS

Model*	A	F	L	Model*	A	F	L	Model*	A	F	L	Depth	C	J	T	Z
SK5-5	14.0	25.5	20.0	SK10-5	28.0	39.5	34.0	SK15-5	41.0	52.5	47.0	5	36.0	79.8	61.1	36.3
SK5-7	14.0	25.5	20.0	SK10-7	28.0	39.5	34.0	SK15-7	41.0	52.5	47.0	7	38.0	81.8	63.1	38.3
SK5-9	14.0	25.5	20.0	SK10-9	28.0	39.5	34.0	SK15-9	41.0	52.5	47.0	9	40.0	83.8	65.1	40.3
N/A				SK10-11**	28.0	39.5	34.0	SK15-11**	41.0	52.5	47.0	11	42.0	85.8	67.1	42.3

\*Dimensions on these drawings are applicable only when using a 1.5" diameter draw-off valve. If a 2" or 3" diameter draw-off valve is required, contact Legion for applicable dimensions.  
\*\*Vertical dimensions of 11" deep pan may be reduced by 2" to match 9" deep pan.

### SKITTLE® ELECTRICAL SPECIFICATIONS (Amperes per Leg)

Model*	kW	208 Volt		240 Volt		380 Volt	415 Volt	440 Volt	480 Volt
		1 Phase	3 Phase-Δ	1 Phase	3 Phase-Δ	3 Phase-Y	3 Phase-Y	3 Phase-Y	3 Phase-Y
SK5-( )	5.9	25.6	14.8	24.6	14.2	9.0	8.2	7.8	7.1
SK10-( )	11.8	51.3	29.6	49.3	28.4	18.0	16.4	15.5	14.2
SK15-( )	17.7	76.9	44.4	73.9	42.7	27.0	24.6	23.3	21.3

U.S. PATENT NOS. 5,553,531, 5,964,145 & DES. 371,715

